


# State of California – NENA i2/VoIP E9-1-1 Deployment

## Typical i2 VoIP ALI Display (E-PAM from Format 04)

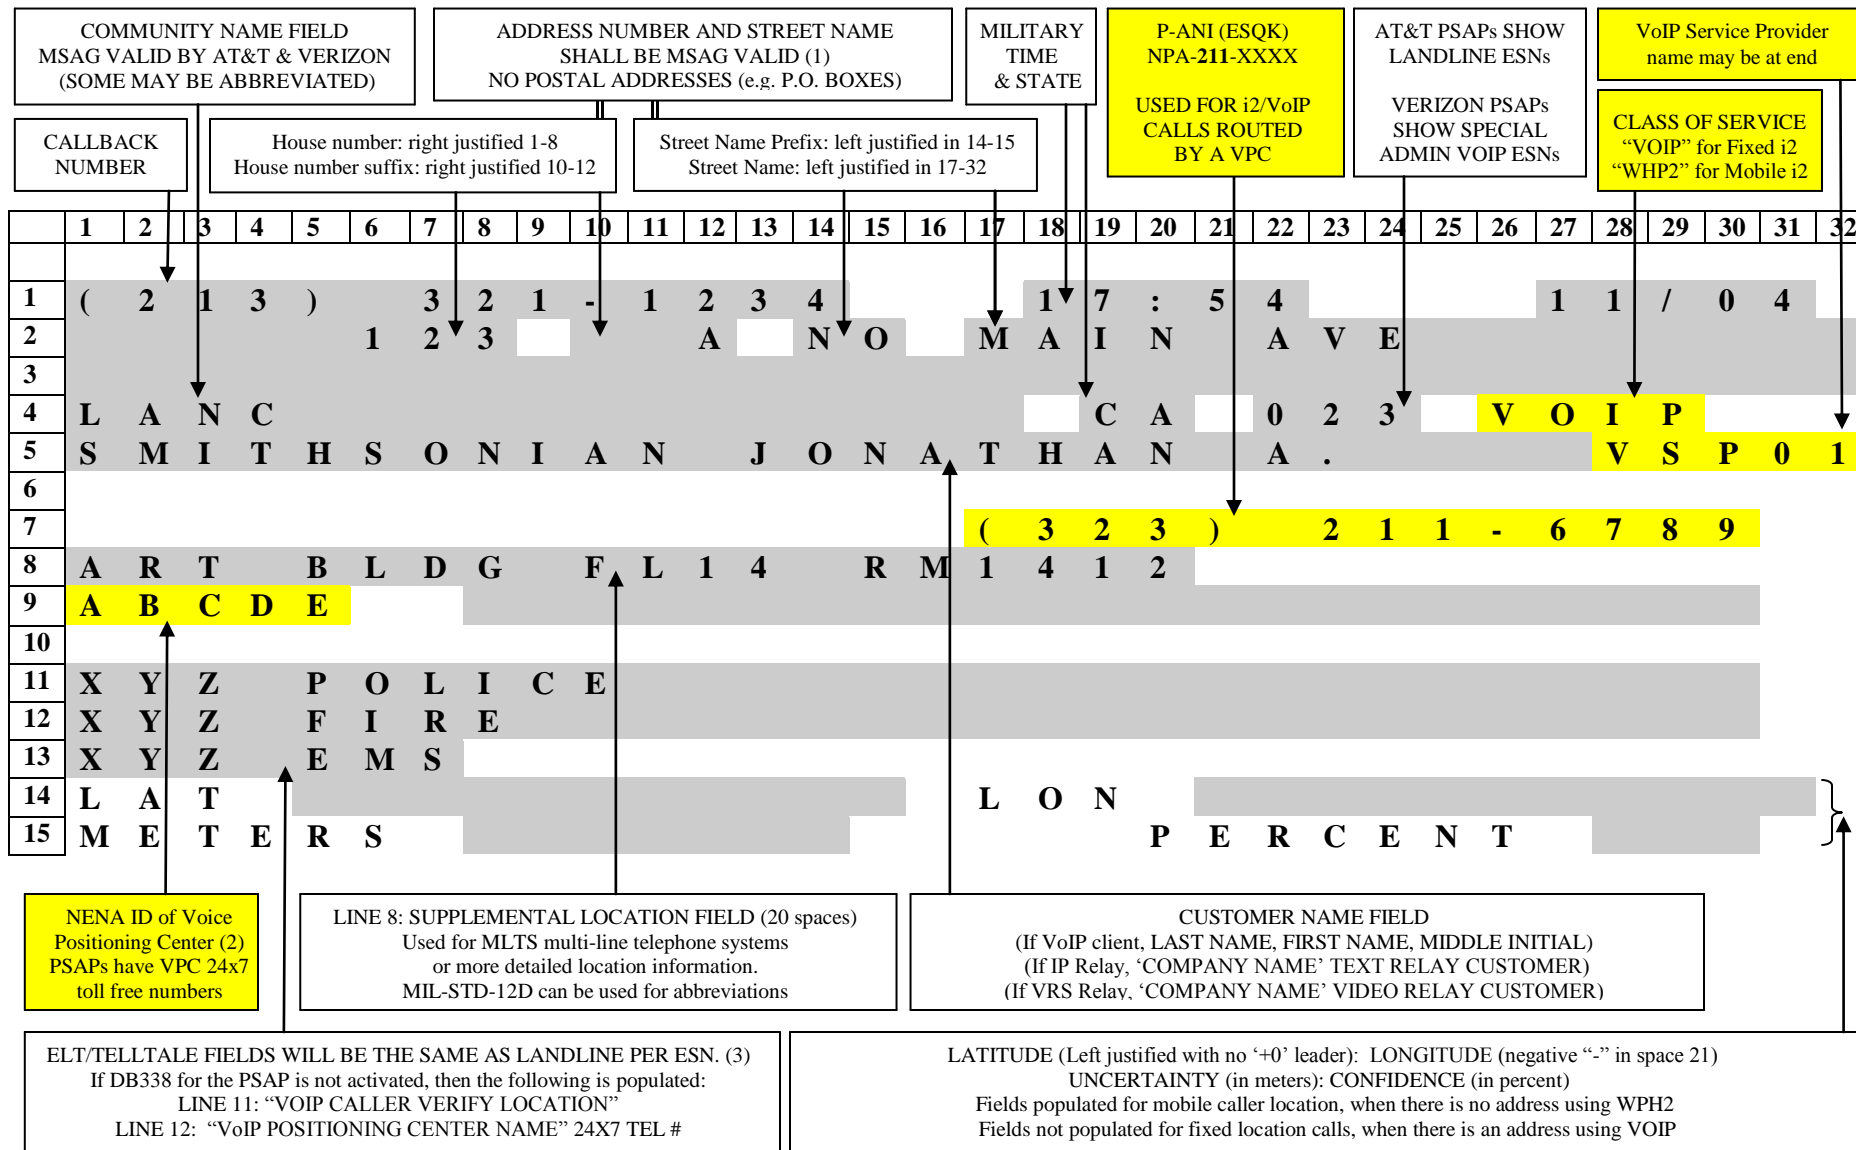

- (1) Non-MSAG Valid addresses go to VPC Call Center for 10-digit routing and correction.
- (2) NENA ID field will show VPC responsible for routing (TCS, TRDO/HBF, VIXXI/DASH/BAND, or TMOB)
- (3) As of 2<sup>nd</sup> Q 2007, DB338 upgrade was made available to PSAPs by AT&T and VZN ALI providers to show telltales.